



The New Generation of Marine Electrical Products



100 Years of Little
Details Make a
Powerful Difference





HBL305CRR




HBL305CRP



HBL102

New & Improved Features / Benefits

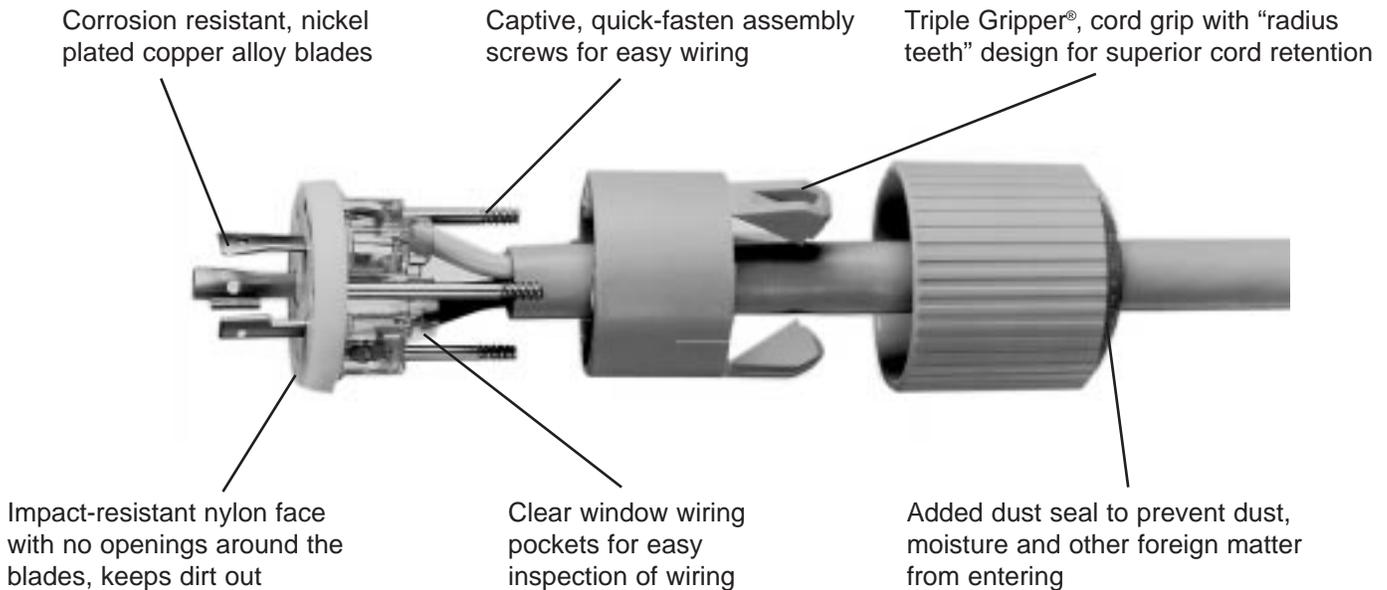

- Configuration specific face prevents infiltration of contaminants which could cause premature failure.
- Simple and fast to wire non-metallic triple grip cord grip automatically grips the cord when you tighten the three assembly screws. The new “radius teeth” design provides secure cord retention, reducing wiring time while protecting the terminations from stress.
- Nickel plated terminals for corrosion resistance.
- Captive, deep slotted, quick-fasten terminal screws are color coded and clearly marked for easy terminal identification.
- Transparent, tear drop shaped wire pockets keep the wire conductors apart from each other and prevent stray wire strands from crossing each other.
- Ribbed nylon exterior shell is non-conductive and easy to grip for safety and ease of handling.
- EPDM dust seal prevents moisture and foreign matter from entering cord grip.



HBL103R



HBL305CRC



302CBI




HBL303SSBL



HBL303NMBL

20A / 30 Amp, 125 Volt Locking Plug and Connector

HBL205CRP / HBL305CRP



HBL205CRP - 20A, 125V Locking Plug
HBL305CRP - 30A, 125V Locking Plug

HBL205CRC / HBL305CRC



HBL205CRC - 20A, 125V Locking Connector
HBL305CRC - 30A, 125V Locking Connector

30A, 125V Receptacle



HBL305CRR

Yellow, locking receptacle, all nickel plated components, backwired.

30A, 125V Inlet



HBL303SSBL - Stylized, Type 316 stainless steel, watertight, shore power inlet. Mounting holes match existing mounting patterns for easy retrofitting. This contemporary looking stainless steel inlet is watertight with the push of a latch.



HBL303NMBL - Non metallic, watertight, shore power inlet. Mounting holes match existing mounting patterns for easy retrofitting. This bright white non-metallic inlet will match the fiberglass of your boat and look good for years to come.



302CBI - Traditionally styled; chrome matted brass housing. Hinged cover locks at 90° in open position, "O" ring between cover and plate seals thread from contamination.



Boots



HBL102

Yellow weatherproof boot used with #HBL205CRP and #HBL305CRP locking plugs.



HBL103R

Yellow weatherproof boot used with non metallic sealing ring. Used with connector body #205CRC and #305CRC when plugging into shore power inlet

Adapters



HBL105A

30A, 125V locking plug with 15 or 20A, 125V straight blade connector



HBL104A

30A, 125V locking connector
15A, 125V straight blade plug

Worldwide Locations

Hubbell Canada (905) 839-1138, Fax (905) 839-9108
Hubbell Ltd. England (441) 234-854444, Fax (441) 234-854008
Hubbell-Taian Co., Ltd., (886) 2 515-0855, Fax (886) 2 515-0899
Hubbell Int'l. Inc., Korea Branch (82) 2 607-1362, Fax (82) 2 603-7386

Hubbell de Mexico, S.A. de C.V. (52) 5 575-2022, Fax (52) 5 559-8626
Caribe Sales Agencies, Puerto Rico (809) 720-7185, Fax (809) 789-2796
Hubbell S.E. Asia Pte., Ltd., 65-4544772, Fax 65-4544775
Hubbell Inc. Middle East (971) 4 369-763, Fax (971) 4 360-541