

# Hubbell SystemOne Recessed




Recessed 4 Inch Fire-Rated Poke-Throughs



## 4 Inch Fire-Rated Poke-Throughs

- Step down installation
- Maintains concrete floor fire rating up to two hours
- Junction box standard, 27 cubic inches
- (1) 3/4 inch conduit for power and (2) 1/2 inch conduits for low voltage
- For use in the City of Chicago, junction box NOT included

**ScrubShield**  
Complies with UL514A

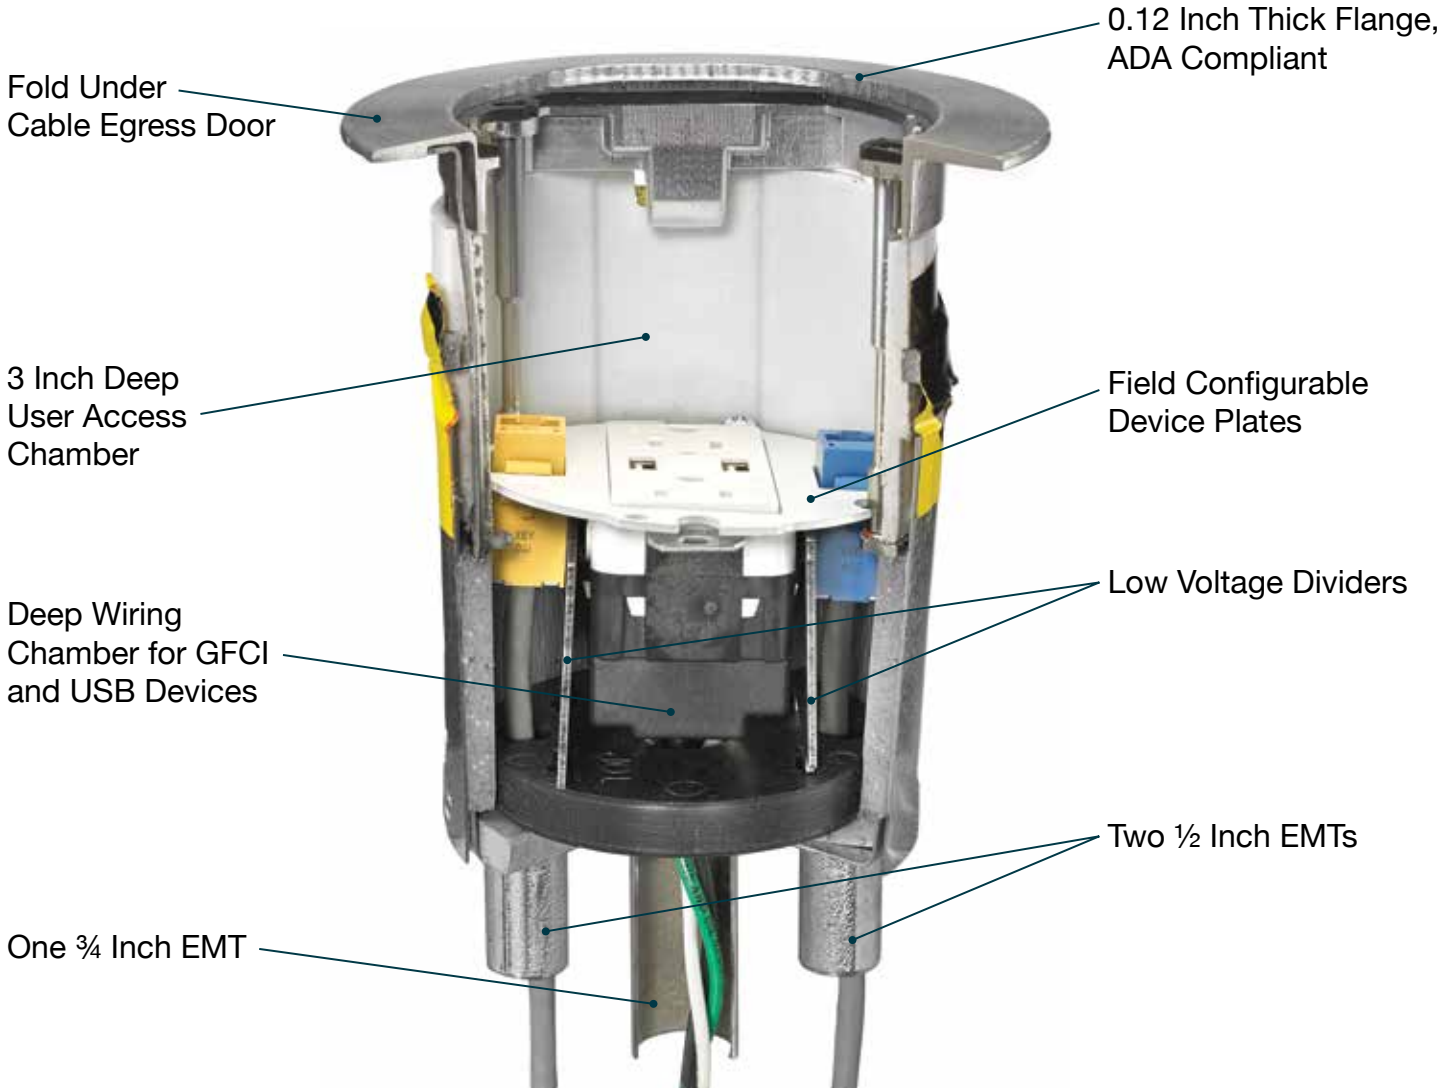

## Ordering Information



4 Inch Fire-Rated Poke-Through	
Description	Catalog Number
4 Inch FRPT includes: Junction box and low voltage dividers.	<b>S1R4PTFIT</b>
4 Inch FRPT includes: Low voltage dividers, Junction box NOT included.	<b>S1R4PTFITCHI</b>
4 Inch FRPT includes: Quad sub-plate and junction box.	<b>S1R4PTQUAD</b>



**S1R4PTFIT**  
**S1R4PTQUAD**



**S1R4PTFITCHI**

## 4 Inch Covers and Device Plates

The 4 Inch recessed cover is available in a number of durable, yet beautiful finishes to match any décor. The flange height of 0.12 inch is ADA compliant and suitable for use on any floor finish. All covers are UL514A, scrubwater compliant.





### Architectural Cover Finishes

Description	Catalog Number
Brushed Aluminum Finish, Single fold under cable egress door.	<b>S1R4CVRALU</b> 
Plated Brushed Brass Finish, Single fold under cable egress door.	<b>S1R4CVRBRS</b> 
Plated Antique Bronze Finish, Single fold under cable egress door.	<b>S1R4CVRBRZ</b> 
Plated Satin Nickel Finish, Single fold under cable egress door.	<b>S1R4CVRNKL</b> 

Note: COVER LOAD RATING: 1,000LBS with 2x safety factor. Load applied through a 3" (76mm) mandrel in center of the cover. Static loads only.



### Multi-Service Device Plates

Description	Catalog Number
2X2 Sub-plate with one duplex device opening and two keystone jack openings*.	 <b>S1R4SP2X2DUPLEX</b>
2X2 Sub-plate with one Style Line® decorator device opening and two keystone jack openings*.	 <b>S1R4SP2X2STYLE</b>



Note: \*Go to [www.hubbell-wiring.com](http://www.hubbell-wiring.com) for data jacks and frames.

For low light applications (i.e. under tables or podiums) consider using Hubbell's LED illuminated receptacles:  
HBL8200ILW 15A, LED or  
HBL8300ILW 20A, LED.



**HBL8300ILW**






### Powder Coated Cover Finishes

Description	Catalog Number
Black Powder Coat Finish, Single fold under cable egress door.	<b>S1R4CVRBLK</b> 
Gray Powder Coat Finish, Single fold under cable egress door.	<b>S1R4CVRGRY</b> 

Note: COVER LOAD RATING: 1,000LBS with 2x safety factor. Load applied through a 3" (76mm) mandrel in center of the cover. Static loads only.



### Single-Service Device Plates

Description	Catalog Number
Four single 20A receptacles. Can be wired as single or two circuit with isolated ground capability, 24 inch wire leads.	 <b>S1R4SPQUAD</b>
One 1.60 inch opening for 20 or 30A Twist-Lock® receptacle.	 <b>S1R4SPTWIST</b>
One 1.40 inch opening for simplex receptacle.	 <b>S1R4SPSIMPLEX</b>
One duplex device opening for power or datacom* applications.	 <b>S1R4SPDUPLICATION</b>
One Style Line® decorator device opening for power or datacom* applications.	 <b>S1R4SPSTYLE</b>

Note: \*Go to [www.hubbell-wiring.com](http://www.hubbell-wiring.com) for data jacks and frames.



## Recessed 4 Inch Core Hole, One-Piece Units



### One-Piece Pre-Wired, Quad Receptacle, Recessed Connectivity, Fire-Rated Poke-Through for Power Only

Assembled unit includes:

- (1) Hubbell SystemOne 4 inch recessed floor fitting (**S1R4PTFIT**)
- (1) Hubbell SystemOne 4 inch recessed activation cover (**S1R4CVRxx**)
- (1) Hubbell pre-wired quad receptacle with mounting plate (**S1R4SPQUAD**)
- (1) Hubbell Junction box (**S1FRPTJB**)

#### Finish

Brushed Aluminum  
Brushed Brass Plated  
Antique Bronze Plated  
Satin Nickel Plated  
Black Powder Coat  
Gray Powder Coat

#### Catalog Number

**S1R4PTQUADALU**  
**S1R4PTQUADBRS**  
**S1R4PTQUADBRZ**  
**S1R4PTQUADNKL**  
**S1R4PTQUADBLK**  
**S1R4PTQUADGRY**



### One-Piece, Fire-Rated Poke-Through, Recessed Connectivity

Assembled unit includes:

- (1) Hubbell SystemOne 4 inch recessed floor fitting (**S1R4PTFIT**)
- (1) Hubbell SystemOne 4 inch recessed activation cover (**S1R4CVRxx**)
- (1) Hubbell Junction box (**S1FRPTJB**)

#### Finish

Brushed Aluminum  
Brushed Brass Plated  
Antique Bronze Plated  
Satin Nickel Plated  
Black Powder Coat  
Gray Powder Coat

#### Catalog Number

**S1R4PTALU**  
**S1R4PTBRS**  
**S1R4PTBRZ**  
**S1R4PTNKL**  
**S1R4PTBLK**  
**S1R4PTGRY**



Note: xx indicates finish options.



## Design Solutions for:

Retail, Cafeterias, Commercial Office Space, Mass Transit Hubs, Education.



Tile

Carpet

Terrazzo

For Technical files, including BIM models, CAD files and Customer drawings, please visit [www.hubbell-wiring.com](http://www.hubbell-wiring.com) under the Technical tab.