

# Hubbell Power Strips

*Only UL listed power strip  
approved by CMS for  
patient and critical care  
areas of a healthcare facility*

**Healthcare | UL2930 HCOAs**

**Industrial | UL1449 SPDs**

**Commercial/Retail | UL1363 RPTs**

## UL2930 Listed




### Hubbell HCOA:

- UL2930 listed for patient care areas
- 15A and 20A 125V versions
- 6 ft. or 15 ft. cord length
- #12/3 AWG cord
- Surge protected models in all configurations
- Non-surge protected RPT models in all configurations



45° Angle Plug (15A only)

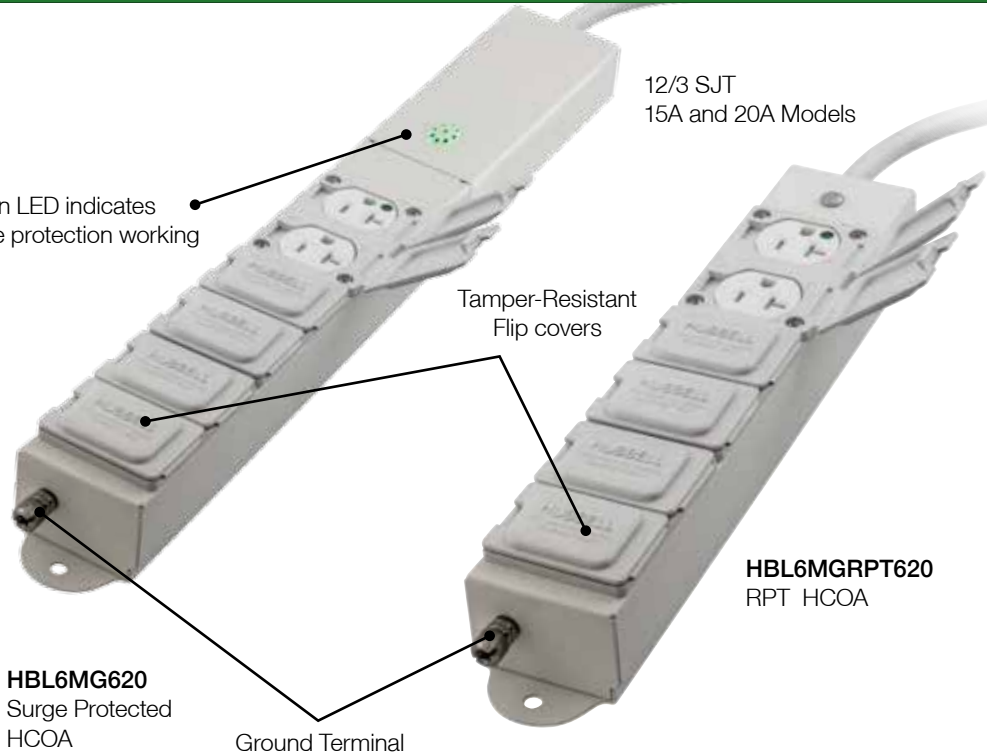

12/3 SJT  
15A and 20A Models

Green LED indicates surge protection working

Tamper-Resistant Flip covers

**HBL6MG620**  
Surge Protected HCOA

Ground Terminal

**HBL6MGRPT620**  
RPT HCOA

## UL2930 Healthcare Outlet Assembly (HCOA)

Description	# of Outlets	Cord Length	Color	15 Amp	20 Amp
UL 2930 HCOA with L-N Surge Protection	6	6 Ft.	White	<b>HBL6MG6</b>	<b>HBL6MG620</b>
UL 2930 HCOA Relocatable Power Tap (RPT)	6	15 Ft.	White	<b>HBL6MG15</b>	<b>HBL6MG1520</b>
UL 2930 HCOA	6	6 Ft.	White	<b>HBL6MGRPT6</b>	<b>HBL6MGRPT620</b>
UL 2930 HCOA Relocatable Power Tap (RPT)	6	15 Ft.	White	<b>HBL6MGRPT15</b>	<b>HBL6MGRPT1520</b>



## UL2930 HCOA Specifications


	HBL6MG6/15	HBL6MG20/1520	HBL6MGRPT6/15	HBL6MGRPT20/1520	Physical Specifications
<b>Electrical Specifications</b>					
Current	15A	20A	15A	20A	Cord 12/3 SJT
Voltage	125V	125V	125V	125V	Housing 18G Galvanized Steel
Frequency	60Hz	60Hz	60Hz	60Hz	Color White Powder Coat
Surge Component	MOV	MOV	n/a	n/a	Receptacles HG Tamper Resistant
<b>Performance</b>					Plug: 15A HG 45° Angle
UL VPR L-N	600V				20A HG 90° Angle
L-G, N-G	n/a				LED (HBL6MG Series only) Green Power Indicator
EMI Noise Filtration:	-11 dB to -68 dB (10kHz to 100MHz)				<b>Dimensions</b>
In (Nominal Discharge Current)	3kA				HBL6MG Series:
MCOV	150V				Length 16.02" (406.9mm)
Peak Current Rating L-N	30KA		n/a	n/a	Width 2.22" (56.4mm)
Leakage Current:	<.1mA				Depth 1.92" (48.8mm)
Total Joules (L-N)	550j				HBL6MGRPT Series:
<b>Environmental Specifications</b>					Length 12.72" (323.1mm)
Operating Temperature	-40°F to 160°F (-40°C to 70°C)				Width 2.22" (56.4mm)
<b>Certifications</b>					Depth 1.92" (48.8mm)

UL 2930; UL File # E488399; RoHs Compliant; NFPA 99 2012 ed; ANSI / IEEE Category A (HBL6MG Series Only)

# Heavy Duty SpikeShield® Surge Protection for Industrial and Healthcare Applications

## Healthcare Industry:

- Hospital Grade • Tamper-Resistant Receptacles with a Hospital Grade • Plug
- cULus 1449 4th Edition
- Heavy Duty Metal Housing
- Available with a 2-Port USB Charging Outlet

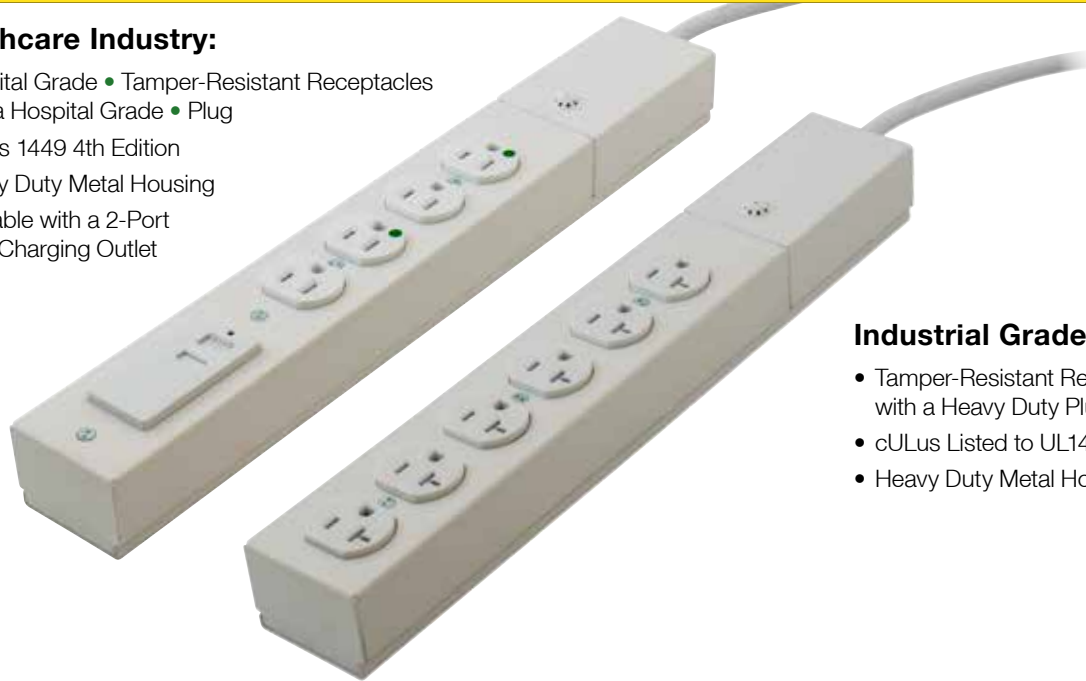

Listed to UL1449



## Industrial Grade:

- Tamper-Resistant Receptacles with a Heavy Duty Plug
- cULus Listed to UL1449 4th Edition
- Heavy Duty Metal Housing

## SpikeShield® Surge Protective Devices (SPD) with Hospital Grade • Tamper-Resistant Receptacles and Hospital Grade • Plug

Description	# of Outlets	Cord Length	Color	15 Amp	20 Amp
Type 3 SPD, Heavy Duty Metal Housing	6	6 Ft.	White	<b>HBL6HG6</b>	<b>HBL6HG620</b>
	6	15 Ft.	White	<b>HBL6HG15</b>	<b>HBL6HG1520</b>
UL Type 3 SPD, Heavy Duty Metal Housing with 2-port USB	4	6 Ft.	White	<b>HBL6HGUSB6</b>	—



## SpikeShield® Surge Protective Devices (SPD) with Industrial Grade Tamper-Resistant Receptacles and Heavy Duty Plug

Description	# of Outlets	Cord Length	Color	15 Amp	20 Amp
Type 3 SPD, Heavy Duty Metal Housing	6	6 Ft.	White	<b>HBL6SS6</b>	<b>HBL6SS620</b>
	6	15 Ft.	White	<b>HBL6SS15</b>	<b>HBL6SS1520</b>



## SpikeShield® SPD Specifications

	15 Amp HBL6SS/HBL6HG Series	20Amp HBL6SS/HBL6HG Series
<b>Electrical Specifications</b>		
Current	15A	20A
Voltage	125V	125V
Frequency	60Hz	60Hz
Surge Component	MOV	MOV
Over Current Protection	15A CB	20A CB
2-Port USB (HBL6HGUSB6)	5V DC Type A	n/a
UL VPR	L-N 500V	L-G 600V
		N-G 600V
MCOV		150V
Peak Current Rating L-N		30KA
Leakage Current:		<.5mA
EMI / RFI Noise Rejection		-11 dB to -68 dB (10kHz to 100MHZ)
Total Joules (all modes)		1100j

## Certifications

cULus Listed to UL1449 4th Edition  
UL File # E143272  
RoHs Compliant  
NFPA 99 2012 ed  
ANSI / IEEE Category A  
cULus Listed to UL1310 (2-Port USB)

## Physical Specifications

<b>HBLH6USB6:</b>		
Length	15.67"	(398.0mm)
Width	2.22"	(56.4mm)
Depth	1.78"	(45.2mm)
<b>HBL6HG Series:</b>		
<b>HBL6SS Series:</b>		
Length	14.42"	(366.3mm)
Width	2.22"	(56.4mm)
Depth	1.70"	(43.3mm)

## Environmental Specifications

Operating Temperature	-40°F to 160°F (-40°C to 70°C)
-----------------------	--------------------------------



Listed to UL1363



- Heavy-duty 18 gauge galvanized steel housing with durable powder coat finish
- Available in 15A and 20A configurations
- 6' and 15' cord length options for all models
- 15A models feature a 45° angle plug
- 20A models feature a 90° angle plug
- All models come with built in circuit breaker for over current protection
- Church-key openings on the back of the RPT for temporary mounting ease
- White powder coat RPTs feature UL Listed Hospital Grade, Tamper-Resistant Receptacles
- Black powder coat RPTs feature Specification Grade, Tamper-Resistant Receptacles



### Relocatable Power Tap with Hospital Grade Tamper-Resistant Receptacles

Description	# of Outlets	Cord Length	Color	15A 125V	20A 125V
RPT, Heavy Duty Metal Housing	6	6 Ft.	White	<b>HBL6RPT6</b>	<b>HBL6RPT620</b>
	6	15 Ft.	White	<b>HBL6RPT15</b>	<b>HBL6RPT1520</b>

### Relocatable Power Tap with Specification Grade Tamper-Resistant Receptacles

Description	# of Outlets	Cord Length	Color	Catalog Number	20A 125V
RPT, Heavy Duty Metal Housing	6	6 Ft.	Black	<b>HBL6RPT6BK</b>	<b>HBL6RPT620BK</b>
	6	15 Ft.	Black	<b>HBL6RPT15BK</b>	<b>HBL6RPT1520BK</b>



### Relocatable Power Tap Specifications

	15A	20A
<b>Electrical Specifications</b>		
Current	15A	20A
Voltage	125V	125V
Frequency	60Hz	60Hz
Over Current Protection	15A CB	20A CB

#### Physical Specifications

Length	11.12" (282.4)
Width	2.22" (56.4)
Height	1.6" (40.5)

#### Environmental Specifications

Operating Temperature	-40°F to 160°F (-40°C to 70°C)
-----------------------	-----------------------------------

#### Certifications

cULus Listed UL1363 RPT