



# Permanently Marked Receptacles


HUBBELL®  
Wiring Device-Kellems

## for Automatic Outlet Control Systems

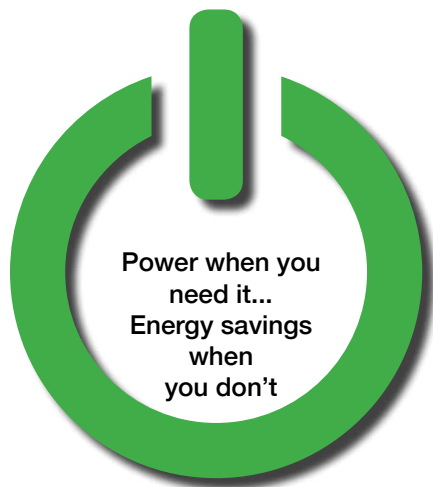

- ⏻ Permanent power symbol remains clearly visible after installation
- ⏻ Control both outlets per device for 100% controlled applications or just one outlet for 50% controlled applications
- ⏻ Ideal for commercial buildings, retail, schools, hotel rooms
- ⏻ Available in SNAPConnect® and conventionally wired versions
- ⏻ Part of the Hubbell Load:Logic™ Plug Control system. Visit [www.hubbell-wiring.com](http://www.hubbell-wiring.com) for details

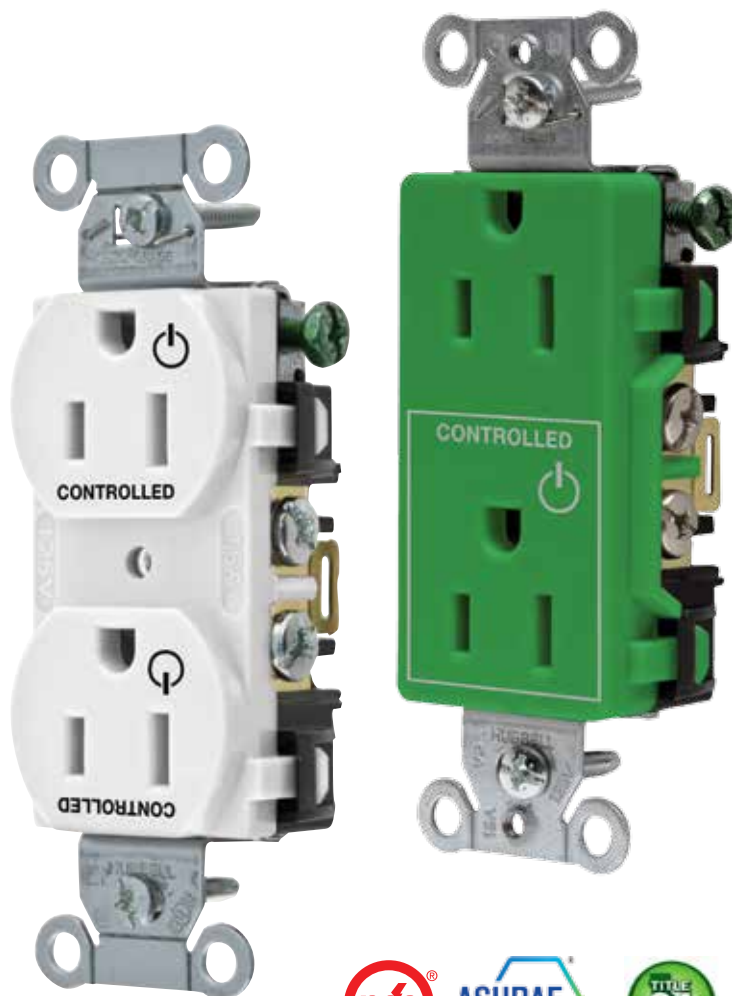

Hubbell permanently marked receptacles for automatic outlet control systems are embossed with the universally recognized  power symbol and the word “**CONTROLLED.**” These markings clearly identify which convenience outlets are turned off when the workspace is vacant.



Automatic Outlet Control systems are required for at least 50% of the receptacles installed in private offices, open offices, and computer classrooms



# Permanently Marked Receptacles

## Codes and Standards

2014 National Electric Code®



ASHRAE Energy Efficiency Standard 90.1 2010



California Title 24 2013




2014 Section 406.3 (E) requires that all non-locking, 125V, 15A and 20A receptacles controlled by an automatic control device or by an automatic energy management system must be marked with the symbol.

Standard 90.1-2010 requires that 50 percent of all 125V, 15A and 20A receptacles in private offices, open offices, and computer classrooms be controlled by an automatic control device. Controlled receptacles need to be marked to differentiate them from non-controlled receptacles.

California Title 24 2013 requires that in all buildings, both controlled and uncontrolled 120V receptacles shall be provided in each private office, open office area, reception lobby, conference room, kitchenette in office spaces, and copy room.

## Permanently Marked Receptacles for use with Automatic Outlet Control Systems

Description	Color	One Controlled Face Split Circuit Hot Tab		Two Controlled Faces	
		15A	20A	15A	20A
<b>Duplex</b> Smooth nylon face, back and side wired.	Black Blue Brown Gray Green Ivory Light Almond Red White	BR15C1BLK BR15C1BL BR15C1 BR15C1GRY BR15C1GN BR15C1I BR15C1LA BR15C1R BR15C1WHI	BR20C1BLK BR20C1BL BR20C1 BR20C1GRY BR20C1GN BR20C1I BR20C1LA BR20C1R BR20C1WHI	BR15C2BLK BR15C2BL BR15C2 BR15C2GRY BR15C2GN BR15C2I BR15C2LA BR15C2R BR15C2WHI	BR20C2BLK BR20C2BL BR20C2 BR20C2GRY BR20C2GN BR20C2I BR20C2LA BR20C2R BR20C2WHI
<b>Style Line® Decorator</b> Smooth nylon face, back and side wired.	Black Blue Brown Gray Green Ivory Light Almond Red White	DR15C1BLK DR15C1BL DR15C1 DR15C1GRY DR15C1GN DR15C1I DR15C1LA DR15C1R DR15C1WHI	DR20C1BLK DR20C1BL DR20C1 DR20C1GRY DR20C1GN DR20C1I DR20C1LA DR20C1R DR20C1WHI	DR15C2BLK DR15C2BL DR15C2 DR15C2GRY DR15C2GN DR15C2I DR15C2LA DR15C2R DR15C2WHI	DR20C2BLK DR20C2BL DR20C2 DR20C2GRY DR20C2GN DR20C2I DR20C2LA DR20C2R DR20C2WHI
<b>SNAPConnect®</b> Standard Duplex Smooth nylon face.	Black Blue Brown Gray Green Ivory Light Almond Red White	SNAP5262C1BK SNAP5262C1BL SNAP5262C1 SNAP5262C1GY SNAP5262C1GN SNAP5262C1I SNAP5262C1LA SNAP5262C1R SNAP5262C1W	SNAP5362C1BK SNAP5362C1BL SNAP5362C1 SNAP5362C1GY SNAP5362C1GN SNAP5362C1I SNAP5362C1LA SNAP5362C1R SNAP5362C1W	SNAP5262C2BK SNAP5262C2BL SNAP5262C2 SNAP5262C2GY SNAP5262C2GN SNAP5262C2I SNAP5262C2LA SNAP5262C2R SNAP5262C2W	SNAP5362C2BK SNAP5362C2BL SNAP5362C2 SNAP5362C2GY SNAP5362C2GN SNAP5362C2I SNAP5362C2LA SNAP5362C2R SNAP5362C2W
<b>SNAPConnect®</b> Decorator Duplex Smooth nylon face.	Black Blue Brown Gray Green Ivory Light Almond Red White	SNAP2152C1BK SNAP2152C1BL SNAP2152C1 SNAP2152C1GY SNAP2152C1GN SNAP2152C1I SNAP2152C1LA SNAP2152C1R SNAP2152C1W	SNAP2162C1BK SNAP2162C1BL SNAP2162C1 SNAP2162C1GY SNAP2162C1GN SNAP2162C1I SNAP2162C1LA SNAP2162C1R SNAP2162C1W	SNAP2152C2BK SNAP2152C2BL SNAP2152C2 SNAP2152C2GY SNAP2152C2GN SNAP2152C2I SNAP2152C2LA SNAP2152C2R SNAP2152C2W	SNAP2162C2BK SNAP2162C2BL SNAP2162C2 SNAP2162C2GY SNAP2162C2GN SNAP2162C2I SNAP2162C2LA SNAP2162C2R SNAP2162C2W



### Right Angle Pigtailed Terminal for SNAPConnect® Receptacles

Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material.

Solid	Stranded
SNAP1RA	SNAP2RA

### Permanent Controlled Receptacle Label

For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling. 60 labels of each per pack

CL60