

Delivery Systems

Work Surface Connectivity Boxes




Delivering Power and Data
to the Work Surface





Pre-Wired Work Surface Series

The Hubbell Work Surface Series products deliver power and low voltage services to the work surface. An open architecture design allows keystone jacks or Hubbell iSTATION™ connectivity to configure specific needs for AV and multi-media, making them the perfect solution for kiosks, work stations and hospitality applications.

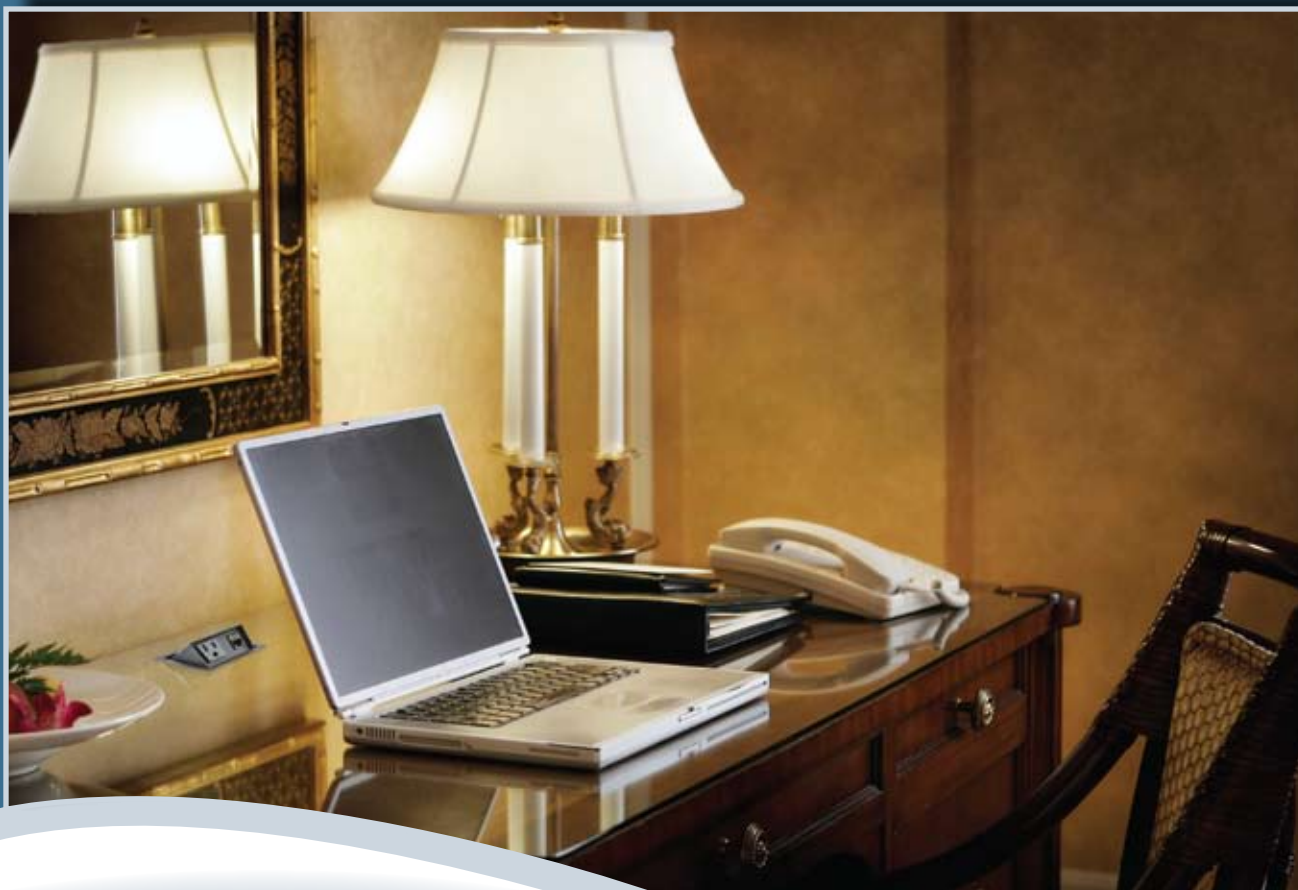

Multiple finish options to match any style or décor. All models in the Work Surface Series are pre-wired for easy installation.



WSBC21UBK

Square Lift-Up Style

Description	Dimensions	Finish	Catalog Number
Two (2) pre-wired 15A outlets with 6-ft. power supply cord; 1-Unit opening for Hubbell iSTATION modules. Unit rotates up when in use and down to conceal services when not in use.	5.75"L x 5.39"W x 4.25"H	Black Silver	WSBC21UBK WSBC21USV



WSBA11BK

Square Mini Lift-Up Style

Description	Dimensions	Finish	Catalog Number
One (1) pre-wired 15A outlet with 9-ft. power supply cord; One (1) RJ-45 jack installed with 6-ft. patch cord. Unit rotates up a 30° angle.	3.7"L x 3.7"W x 2.93"H	Black Brushed Stainless Steel	WSBA11BK WSBA11BSS
Two (2) pre-wired 15A outlets with 9-ft. power supply cord (power only).	3.7"L x 3.7"W x 2.93"H	Black Brushed Stainless Steel	WSBA2BK WSBA2BSS





Pre-Wired Work Surface Series

These Work Surface boxes deliver power and data services above the table and also provide convenience outlets below the table surface. Units can easily be disconnected when tables are moved or stored, providing a flexible electrical and low-voltage infrastructure.



Integrates with Hubbell keystone devices and iSTATION™ modules for AV and Multi-media solutions.

Recessed Concealed Services

Description	Dimensions	Finish	Catalog Number
Two (2) pre-wired 15A outlets with 6-ft. power supply cord; One (1) Low Voltage Plate included with 1-Unit opening for Hubbell iSTATION modules; Two (2) additional 1-Unit openings provided in base of unit.	8.98"L x 5.47"W x 2.97"H	Black Brushed Anod. Alum. Brushed Stainless Steel	WSBB23UBK WSBB23UBAL WSBB23UBSS
Empty Enclosure intended for field wiring.	8.98"L x 5.47"W x 2.97"H	Black	WSBBHWBK



WSBB23UBK



WSBF22BK



WSBFGROMSV

Grommet Style

Description	Dimensions	Finish	Catalog Number
Two (2) pre-wired 15A recessed outlets with 6-ft. power supply cord; Two (2) Hubbell Keystone openings.	8.62"L x 3.0"W x 2.25"H	Black Silver	WSBF22BK WSBF22SV
Flush Grommet Cover with dust shield.	5.68"L x 3.39"W x 0.96"H	Black Silver Stainless Steel Brushed Aluminum	WSBFGROMBK WSBFGROMSV WSBFGROMBSS WSBFGROMBAL





Pre-Wired Work Surface Series

Lab benches and computer stations often require convenience power and data services for user interface. These two modules offer several configurations that can mount to table edges, above or below the surface.



Several profile options offer power and low-voltage services, depending on the requirements.



WSBD21UBK

Under Table Mount



Description	Dimensions	Finish	Catalog Number
Two (2) pre-wired 15A outlets with 9-ft. power supply cord; One (1) Low Voltage Plate included with 1-Unit opening for Hubbell iSTATION™ modules.	6.50"L x 1.75"W x 2.25"H	Black	WSBD21UBK



WSBE22SV

Work Surface Mount



Description	Dimensions	Finish	Catalog Number
One (1) pre-wired 15A outlet with 9-ft. power supply cord; One (1) Hubbell Keystone opening.	3.57"L x 2.19"W x 2.50"H	Black Silver	WSBE11BK WSBE11SV
Two (2) pre-wired 15A outlets with 9-ft. power supply cord; Two (2) Hubbell Keystone openings.	6.32"L x 2.19"W x 2.50"H	Black Silver	WSBE22BK WSBE22SV
Three (3) pre-wired 15A outlets with 9-ft. power supply cord; One (1) Low Voltage Plate included with 1-Unit opening for Hubbell iSTATION™ modules.	8.25"L x 2.19"W x 2.50"H	Black Silver	WSBE31UBK WSBE31USV
Mounting bracket with thumb screw (optional).	n/a	n/a	WSBECLAMP





Pre-Wired Work Surface “Elite” Series

The “Elite” series of work surface boxes offer a higher end solution for the most attractive spaces. Power and data services blend with the environment, but are easy to access. Architectural finishes ensure a pleasing look.



Architectural finishes for high end spaces. Conceal services while providing an easy interface for users. Cable management features reduce clutter.

Recessed Concealed Services

Description	Dimensions	Finish	Catalog Number
Four (4) pre-wired 15A outlets with 6-ft. power supply cord; Three (3) Low Voltage Plates included with 1-Unit opening for Hubbell iSTATION™ modules. With dampened, retractable cover.	15.0"L x 9.0"W x 6.25"H	Black Anod. Alum. Clear Anod. Alum. Black Silver	WSBG43UBBA WSBG43UBAL WSBG43UBK WSBG43USV



WSBG43UBAL
(Cover doors shown open)

Pop-Up Style

Description	Dimensions	Finish	Catalog Number
Base Unit with Four (4) pre-wired 15A outlets with 6-ft. power supply cord; Two (2) Low Voltage plates included with 1-Unit opening for Hubbell iSTATION™ modules.	8.90"L x 8.90"W x 13.9"H	—	WSBH42U
Trim Ring and Decorative Round Top.	5.25" Diameter	Black Stainless Steel	WSBHTRBK WSBHTRBSS



WSBH42U with
WSBHTRBK



Furniture and Work Surface Connectivity Boxes



HBLSHA2



HBLPHA2



HBLCON2



HBLMIR2



HBLMAR2

Square Flush Mount Boxes

Description	Dimensions	Finish	Catalog Number
2-Gang Square Flush Mount Box with Cover.	6.5"L x 6.5"W x 3.75"H	Black	HBLSHA2
2-Gang Square Flush Mount Box with Cover.	6.5"L x 6.5"W x 3.75"H	Stainless Steel	HBLSHA2BSS

Rectangular Flush Mount Boxes

Description	Dimensions	Finish	Catalog Number
2-Gang Rectangular Flush Mount with Cover.	10.75"L x 4.06"W x 3.5"H	Black	HBLPHA2
2-Gang Rectangular Flush Mount with Cover.	10.75"L x 4.06"W x 3.5"H	Stainless Steel	HBLPHA2BSS
4-Gang Rectangular Flush Mount with Cover.	10.75"L x 6.5"W x 3.5"H	Black	HBLPHA4
4-Gang Rectangular Flush Mount with Cover.	10.75"L x 6.5"W x 3.5"H	Stainless Steel	HBLPHA4BSS

Surface Mount Boxes

Description	Dimensions	Finish	Catalog Number
2-Gang Surface Mount Box.	4.19"L x 4.81"W x 2.44"H	Black	HBLCON2
3-Gang Surface Mount Box.	6.19"L x 4.81"W x 2.44"H	Black	HBLCON3

Recessed Mount Boxes

Description	Dimensions	Finish	Catalog Number
4-Gang Recessed Mount.	10.25"L x 7.0"W x 5.88"H	Black	HBLMIR2
8-Gang Recessed Mount.	31.0"L x 10.25"W x 5.88"H	Black	HBLMIR4

Under Desk Mount Boxes

Description	Dimensions	Finish	Catalog Number
2-Gang Under Desk Mount.	9.19"L x 3.0"W x 2.88"H	Black	HBLMAR2
3-Gang Under Desk Mount.	13.69"L x 3.0"W x 2.88"H	Black	HBLMAR3

Hubbell – Screw Type Face Plates

HBLST302SBK	HBLDE301SBK	HBLBL300SBK	HBLIMFSBK	HBL317SBK
				
Duplex	Style Line® Decorator Opening	Blank	3-Unit Hubbell iSTATION™	Hubbell 6-Port

Table Top Boxes



TTBKSBK



TTBXLRBK



TTBDS1BK



TTBDS2BK

Low Voltage Only

Description	Dimensions	Finish	Catalog Number
Table Top box; 2-inch diameter hole; One (1) keystone opening; Keystone modules sold separately.	2.19" Diameter	Black Anod. Alum. Clear Anod. Alum. Solid Brass	TTBKSBK TTBKSAAL TTBKSBK
Table Top box; 2-inch diameter hole; One (1) XLR microphone jack installed.	2.19" Diameter	Black Anod. Alum. Clear Anod. Alum. Solid Brass	TTBXLRBK TTBXLRAL TTBXLRR

Pre-Wired Dual-Service



Description	Dimensions	Finish	Catalog Number
Table Top box; 3.5-inch diameter hole; One (1) pre-wired 15A outlet with 9-ft. power supply cord; One (1) 3.5mm screw terminal audio jack; One (1) 15-pin gender changer F/F; Two (2) keystone openings; Keystone modules sold separately.	3.88" Diameter	Black Anod. Alum. Clear Anod. Alum. Solid Brass	TTBDS1BK TTBDS1AL TTBDS1BR
Table Top box; 3.5-inch diameter hole; Two (2) pre-wired 15A outlets with 9-ft. power supply cord; Two (2) keystone openings; Keystone modules sold separately.	3.88" Diameter	Black Anod. Alum. Clear Anod. Alum. Solid Brass	TTBDS2BK TTBDS2AL TTBDS2BR



Wiring Devices and Multimedia Connectivity

Hubbell Power Devices

	Extra Heavy Duty Spec Grade	
	15A, 125V 20A, 125V	HBL5262x HBL5362x
	Hubbell-Pro™	
	15A, 125V 20A, 125V	5262x 5362x
	Style Line® Decorator	
	15A, 125V 20A, 125V	DR15x DR20x
	Isolated Ground (Orange)	
	15A, 125V 20A, 125V	IG5252 IG5352
	Surge Suppression	
	15A, 125V 20A, 125V	HBL5262xSA HBL5362xSA
	Heavy Duty Commercial LED GFCI	
	15A, 125V 20A, 125V	GF15xLA GF20xLA

x=colors: AL (Almond), BK (Black), GY (Gray), I (Ivory), OW (Office White), W (White) or no suffix (Brown)

Blank Data Frames

	Duplex Outlet Frame	
	2-Port 4-Port	BR106x Q106x
	Style Line® Decorator Frame	
	2-Port	ISF2x
	3-Port	ISF3x
	4-Port	ISF4x
6-Port	ISF6x	

x=colors: AL (Almond), BK (Black), GY (Gray), EI (Electric Ivory), OW (Office White) or W (White).

Work Surface Box Data Plates

	Data Plates**	
	Blank, 1-Unit iSTATION™ Cut-out, 1-Unit	WSBPLATE1 WSBPLATE2

** For use with "Work Surface Box" series only, catalog numbers starting with WSB.

Keystone Snap Fit

	Jacks	
	Category 6 Snap Fit	Category 5e Snap Fit
	HXJ6x	HXJ5Ex

x=colors: B (Blue), OW (Office White) or W (White).

USB Coupler

	USB Coupler	
	A to B A to A	SFUSBABx SFUSBAAx

x=colors: B (Blue), OW (Office White) or W (White).

Data Coupler

	Data Coupler	
	Category 6 Category 5e	SFC6BK SFC5EBK

RCA Connector

	RCA Connector	
	Solder 110 Termination	SFRCx(x) SFRC110(x)
	Pass-through	SFRC(x)Rx

x=colors: AL (Almond), BK (Black), GY (Gray), EI (Electric Ivory), OW (Office White) or W (White)

(x)= insulator color: BK (Black), B (Blue), GN (Green), OR (Orange), R (Red), W (White) or Y (Yellow).

XLR 3-Pin Connector

	XLR 3-Pin Connector	
	Solder Screw Terminal	XLR10 XLRST10
	Blank Module, 1.5-Unit, 10 PK	IMAVB15W

HDMI Connector

	HDMI Connector	
	Coupler 3" Tail	HDMIC1 HDMIT1
	Blank Module, 1-Unit, 10 PK	IMBDS1W

HDMI Decorator Frame

	HDMI Decorator Frame	
	Description	1-Port 2-Port

Female to Female	NS801x	NS802x
------------------	---------------	---------------

x=color: AL (Almond), BK (Black), GY (Gray), I (Ivory), LA (Light Almond) or W (White).

AV Horizontal Run

	AV Horizontal Run	
	Description	Non-Plenum Plenum

8-Pin	VGA6xxxBK	VGA6PxxxBK
-------	------------------	-------------------

xxx=length: 5 ft. (05) to 100 ft. (100). Order in multiples of 5 ft.

X-END™

X-END™ Keystone Snap Fit Connectors

8-Pin Female; Black
Keystone, 4" Tail
Keystone, 90°
Keystone, Straight



SFAVCT
SFAVCN
SFAVCS

X-END™ AV Plug-n-Play Bulk Connectors

15-Pin HD15; 8-Pin Female
Straight 180°
Angled 45°
Right Angle 90°



15S6P1*
15A6P1*
15N6P1*

* Add 0 at end of part number to get a package of 10 pieces.

X-END™ Plug-n-Play Modules

8-Pin Female



S-Video with 3.5mm Audio; 1-Unit
S-Video with 2 RCA L/R Audio; 1-Unit
3 RCA Composite Video with L/R Audio; 1-Unit
3 RCA Component Video; 1-Unit
3 RCA Composite S-Video with L/R Audio; 1.5-Unit
4 RCA Component Video with S/PDIF; 1.5-Unit
5 RCA Component Video with LR Audio; 1.5-Unit
3 RCA Component with 3.5mm Audio; 1.5-Unit
3 RCA Component with S-Video; 1.5-Unit
5-BNC RGBHV; 1.5-Unit

IMS3581xx
IMSR81xx
IMR8P1xx
IMCR81xx
IMSRC815xx
IMCRD815xx
IMCAR815xx
IMC35815xx
IMSCCR815xx
IMB815xx

xx = Module Color: AL (Almond), BK (Black), EI (Electric Ivory), GY (Gray), LA (Light Almond), OW (Office White) or W (White).

X-END™ AV Plug-n-Play Application Tails

8-Pin Female; 1-ft. Tail



S-Video with 3.5mm Audio
S-Video with 2 RCA L/R Audio
3 RCA Composite Video with L/R Audio
3 RCA Component Video
3 RCA Composite S-Video with L/R Audio
4 RCA Component Video with S/PDIF
5 RCA Component Video with LR Audio
3 RCA Component with 3.5mm Audio
3 RCA Component with S-Video
5-BNC RGBHV
15-Pin HD15 Female (VGA Style)
15-Pin HD15 Male (VGA Style)

AVS35T1
AVSRAT1
AVRCT1
AVCRT1
AVSRCT1
AVCRDT1
AVCART1
AVC35T1
AVSCRT1
AVBT1
15T6P1*
15MP6P1*

* Add 0 at end of part number to get a package of 10 pieces.

X-END™ AV Plug-n-Play Application Patching Runs

8-Pin Female



S-Video with 3.5mm Audio
S-Video with 2 RCA L/R Audio
3 RCA Composite Video with L/R Audio
3 RCA Component Video
3 RCA Composite S-Video with L/R Audio
4 RCA Component Video with S/PDIF
5 RCA Component Video with LR Audio
3 RCA Component with 3.5mm Audio
3 RCA Component with S-Video
5-BNC RGBHV
15-Pin HD15 Female (VGA Style)

AVS35xx
AVSRAxx
AVRCxx
AVCRxx
AVSRCxx
AVCRDxx
AVCARxx
AVC35xx
AVSCRxx
AVBxx
AV15Mxx

xx = length: 05 = 5'; 10 = 10'

Hubbell iSTATION™ Modules and Frames

	Keystone Module			Angled Keystone Module			15/9-Pin or HDMI Blank Module	
	1-Port, 1-Unit 2-Port, 1-Unit	IM1K1x IM2K1x		1-Port, 1.5-Unit 2-Port, 1.5-Unit	IM1KA15x IM2KA15x		1-Unit 2-Unit with 3.5mm Stereo Jack	IMBDS1x IMB15315x

For color options replace x with the following: AL (Almond), BK (Black), GY (Gray), EI (Electric Ivory), OW (Office White) or W (White). Please visit our website at www.hubbell-wiring.com to view colors in our virtual catalog.






Visit our website www.hubbell-wiring.com for complete product line.



AV Ceiling Box
Configured with 15A power outlet, 15-pin feed through and 3.5mm audio jack. This unit allows for further customizing by populating two keystone openings. Plenum and non-plenum versions available.



X-END™ Plug-n-Play AV System
X-END's main focus is the integration of connections from multimedia devices and applications such as:

- Display devices
- White boarding
- Videoconferencing
- Webcasting
- Streaming media content



FDTV Connection Enclosure
Hubbell's netSELECT® Flat Panel Television enclosure delivers high-density connectivity and power in the wall. This allows flat panel displays and interactive "smart" boards to sit flush against walls with no dangling cords. It quickly installs to studs or sheetrock without additional components or hardware.



SystemOne FRPT and Floor Box
Hubbell SystemOne sub-plates are designed to meet the growing needs of the audio and video markets. Some sub-plates provide power outlets with Hubbell's audio/video products including 15-pin SVGA, RCA, S-Video, 3.5mm stereo, and XLR microphone jacks. Other sub-plates can accommodate Extron® Electronics MAAP and AAP series audio/video modules.

HUBBELL®
Wiring Systems

www.hubbell-wiring.com
www.hubbell-premise.com

