

HUBBELL SystemOne

Recessed 6 and 8 Inch

Fire-Rated Poke-Throughs



With HUBBELL,
we have you covered
from start to finish and
everything in between



HUBBELL SystemOne

Table of Contents

| | |
|--|-----|
| Hubbell SystemOne Story | 3 |
| Hubbell SystemOne Features | 4-5 |
| Hubbell SystemOne 6 Inch System | |
| Fire-Rated Poke-Throughs | 6 |
| Sub-Plates, Covers and Accessories . . | 7 |
| Hubbell SystemOne 8 Inch System | |
| Fire-Rated Poke-Throughs | 8 |
| Sub-Plates, Covers and Accessories . . | 9 |
| Hubbell SystemOne One-Piece Units | |
| 6 Inch | 10 |
| 8 Inch | 11 |



HUBBELL SystemOne

Recessed 6 and 8 Inch

Fire-Rated Poke-Throughs

Hubbell's SystemOne Recessed Fire-Rated Poke-Throughs enhance functionality with increased power, data and audio visual capacity. Safety is improved with recessed connectivity, a low profile flange, and egress doors that hinge inwards. Building value is enhanced with plated finishes to match and blend with modern building décor.

Architects, engineers and building owners are challenged by their clients to specify products that enhance building functionality, safety and value. Hubbell's SystemOne recessed product line is designed with those objectives in mind.



With HUBBELL,
we have you covered
from start to finish and
everything in between



Recessed Poke-Through Ordering, Easy as 1, 2, 3.

STEP 1: Select Poke Through



6 Inch
Recessed Access




6 Inch
Furniture Feed




8 Inch
Recessed Access

STEP 2: Select Sub-Plates

6 Inch Recessed Access




60/40 split
Sub-Plates



50/50 split
Sub-Plates

*Furniture feed model does not use sub-plates

8 Inch Recessed Access



Center Sub-Plates
with Outer Sub-plates

STEP 3: Select Cover Finishes



Black
Powder Coat



Bronze
Plated Finish



Brushed
Brass Plated



Satin
Nickel Plated



Brushed
Aluminum

Recommended Fire-Rated Poke-Through Size Chart

To avoid over or under utilizing the capacity of the fire-rated poke-through, first determine how many gangs of power, data and AV are required for the application. The matrix below will guide you to the correct poke-through size.

| | | Recommended Fire-Rated Poke-Through Size | | | | | |
|--------------------|---|--|------------------|---------------------|---------------|----|----|
| POWER GANGS | 5 | 8" | Exceeds capacity | | | | |
| | 4 | 8" | 8" | of Hubbell recessed | | | |
| | 3 | 6" | 8" | 8" | poke-throughs | | |
| | 2 | 6" | 6" | 8" | 8" | | |
| | 1 | 6" | 6" | 6" | 8" | 8" | |
| | 0 | — | 6" | 6" | 8" | 8" | 8" |
| | | 0 | 1 | 2 | 3 | 4 | 5 |
| | | DATA AND AV GANGS | | | | | |

Example: 2 gangs of power, 1 gang of AV & 1 gang of data is required. Find the intersection for 2 power gangs with 2 data/AV gangs. The highlighted intersection defines the recommended FRPT.

Hubbell Poke-Through Selection

Recommendations:

Select 6 Inch product line for recessed applications requiring basic power, data and audio visual connections

Select 8 Inch product line for recessed applications requiring multiple power, data and multiple audio visual connection points

See recommended FRPT size chart below.

Increase flexibility with Hubbell's Video Extenders



Hubbell's HDMI High-Definition 110 Video Extender transmits 1080p signals over two solid unshielded twisted-pair (UTP) cables, allowing video display devices to be located up to 147 feet away from a digital source. Ideal for projectors, smartboards, HDTVs, flat screens and monitors and other video display devices.

Benefits and Enhancements

Safety

- Low profile flange, 0.150", is better than ADA requirements
- Hide-away egress doors fold under cover while in use
- 180° opening of main door


Functionality

- Cables and connections are protected by recessed functionality
- Open architecture sub-plate design
- Dirt ingress reduced by egress door brushes
- Exceeds UL 514A Scrub Requirements with ScrubShield technology
- Easy selection with common flange for all floor types

Value

- Enhance building décor with numerous finishes
- Increase durability and longevity with cast aluminum covers

6 Inch Sub-Plate Features




60/40 Device Plate Combination

- Allows for a wide array of data and audio visual connectivity with a 20A duplex receptacle
- The two plates can be independently wired

50/50 Device Plate Combination

- Accommodates up to two 20A duplex receptacles with eight data or audio visual connections
- The two plates can be independently wired



8 Inch Sub-Plate Features

Center Plate Configurations

- Allows for three duplex receptacles or up to 18 data and or audio visual jacks
- Open architecture sub-plate design accommodates FSR®, Extron®, Crestron®, etc.
- NEMA spacing between devices
- All plates can be independently wired



Outer Plate Configurations

- Available in pre-wired 20A duplex receptacles or data/AV plates
- Multiple 20A duplex receptacles can be wired to a common circuit or independently

On-line Resources

- BIM models, customer drawings and technical specifications are available on www.hubbell-wiring.com.

Increase installation efficiency with Hubbell Pre-Pour Sleeves



- Reduce on-site time and labor by removing the need for floor x-raying or core-hole drilling
- Rigid multi-piece plastic construction
- 6" or 8" outside diameter
- Scaled divisions on mounting legs for easy leveling

Increase protection for high end electronics with Hubbell Surge Receptacles




- 15A and 20A versions
- Meets UL 1449 3rd edition and UL 498
- Green power indication light
- Optional audible alarm



ScrubShield®
Complies with UL514A

6 Inch Fire-Rated Poke-Through Fittings

- Step down installation
- Maintains concrete floor fire rating up to two hours
- Junction box standard
- Includes (1) 2 inch data/AV EMT and (1) 3/4 inch power EMT
- For use in the City of Chicago, junction box NOT included

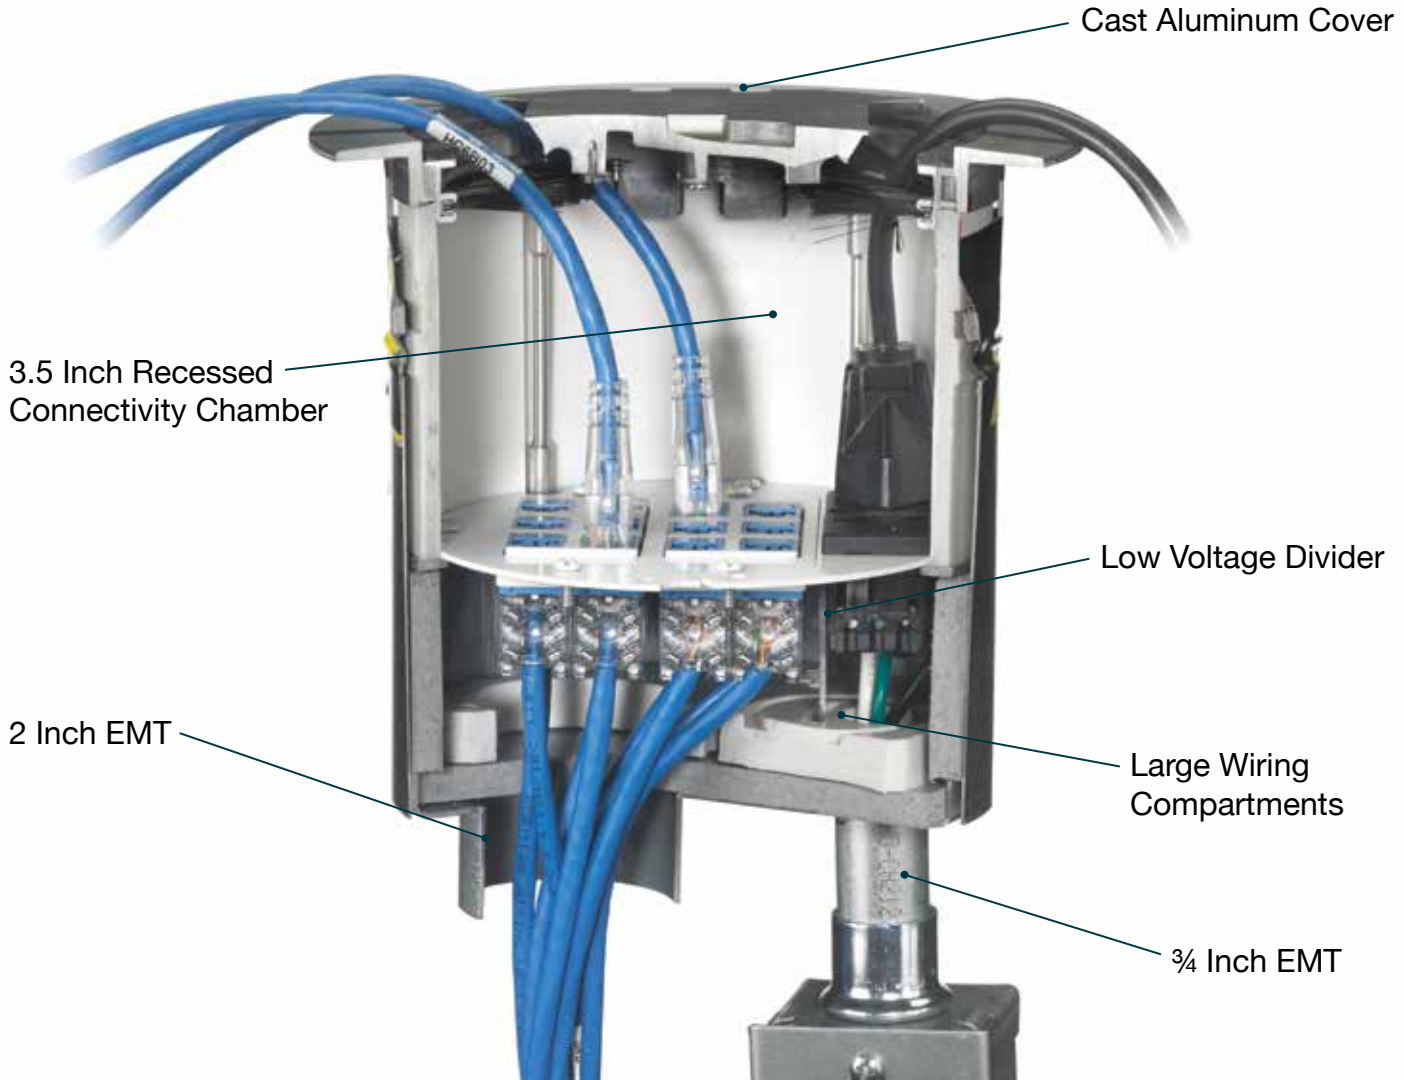

Ordering Information



| 6 Inch Fire-Rated Poke-Through | |
|--|---------------------|
| Description | Catalog Number |
| 6 Inch Fire-Rated Poke-Through | S1R6PTFIT |
| 6 Inch Fire-Rated Poke-Through; for use in the City of Chicago | S1R6PTFITCHI |



S1R6PTFIT



S1R6PTFITCHI





6 Inch Sub-Plates

60/40 Device Plate Combination



- Allows for up to twelve data/AV jacks plus a 20A duplex receptacle
- Two plates which can be wired independently



Left 60% Sub-Plates

| Description | Catalog Number | Description | Catalog Number |
|---|---|--|---|
| (1) Style Line® Decorator and (2) Extron® MAAP openings, left side only |  S1R6SPV | (1) Style Line® Decorator and (2) Extron® AAP openings, left side only |  S1R6SPX |
| (2) Style Line® Decorator openings, left side only |  S1R6SPW | (1) Style Line® Decorator and (2) 1.5 unit Hubbell iSTATION openings, left side only |  S1R6SPY |

Right 40% Sub-Plates

| | | | |
|---|--|---|--|
| (2) 20A pre-wired receptacles; 16 inch lead; one circuit, right side only |  S1R6SPZ | (2) 20A pre-wired receptacles; 25 foot lead; one circuit, right side only |  S1R6SPZ25 |
|---|--|---|--|

Recessed 6 Inch Cover

6 Inch Fire-Rated Poke-Through cover assembled unit includes solid cast aluminum construction, carpet gasket and mounting hardware



| Finish | Catalog Number | Furniture Feed Option |
|----------------------|-------------------|-----------------------|
| Brushed Aluminum | S1R6CVRALU | S1R6FFCVRALU |
| Black Powder Coat | S1R6CVRBLK | S1R6FFCVRBLK |
| Brushed Brass Plated | S1R6CVRBRS | S1R6FFCVRBRS |
| Bronze Plated Finish | S1R6CVRBRZ | S1R6FFCVRBRZ |
| Satin Nickel Plated | S1R6CVRNKL | S1R6FFCVRNKL |

6 Inch Accessories



| Description | Catalog Number |
|--|---|
| Pre-pour tube, including hardware | S1R6PPT* |
| Abandonment plate, black finish | S1R6ADMTBK |
| Low voltage replacement divider | S1R6DIV |
| Power junction box, 27.0 cubic inches; (1) ¾ inch and (1) 1 inch EMT connector | S1FRPTJB |
| Replacement furniture feed fitting | 2 Inch S1RFFFIT2 ¾ Inch S1RFFFIT075 |
| Replacement plugs | 2 Inch S1RPLUG2ALU ¾ Inch S1RPLUG075ALU Aluminum S1RPLUG2BLK S1RPLUG075BLK Black S1RPLUG2BRS S1RPLUG075BRS Brass S1RPLUG2BRZ S1RPLUG075BRZ Bronze S1RPLUG2NKL S1RPLUG075NKL Nickel |











Note: *Not UL Listed.

50/50 Device Plate Combination






- Allows for up to eight Hubbell data jacks plus two 20A duplex receptacles
- Two plates which can be wired independently



Left 50% Sub-Plates

| Description | Catalog Number | Description | Catalog Number |
|--|---|--|---|
| (3) Extron® AAP plate openings, left side only |  S1R6SPA | Blank cover plate, left side only |  S1R6SPB |
| (5) Extron® MAAP plate openings, left side only |  S1R6SPC | (4) 1 unit Hubbell iSTATION openings, left side only |  S1R6SPD |
| (1) Style Line® Decorator and (2) Hubbell keystone openings, left side only |  S1R6SPE | (2) 1.5 unit Hubbell iSTATION openings, left side only |  S1R6SPF |
| (3) Extron® MAAP openings and (2) Hubbell keystone jack openings, left side only |  S1R6SPL | (1) Style Line® Decorator opening, left side only |  S1R6SPM |

Right 50% Sub-Plates

| | | | |
|---|---|--|---|
| (1) 1.60 inch opening for Twist-Lock®, right side only |  S1R6SPG | (4) 20A pre-wired receptacles; 16 Inch leads; one or two circuits, right side only |  S1R6SPH |
| (1) duplex device opening, right side only |  S1R6SPI | (1) 1.40 inch opening for simplex or Twist-Lock®, right side only |  S1R6SPJ |
| (1) Style Line® Decorator device opening, right side only |  S1R6SPK | | |

Note: Sub-plates can not be rotated to create additional layouts. When assembled, sub-plates can not overlap. Custom Plates available upon request and may be subject to minimum order quantity.

Extron® is a registered trademark of Extron Electronics.






ScrubShield®
Complies with UL514A

8 Inch Fire-Rated Poke-Through Fittings

- Step down installation
- Maintains concrete floor fire rating up to two hours
- Junction box standard
- For use in the City of Chicago, junction box NOT included

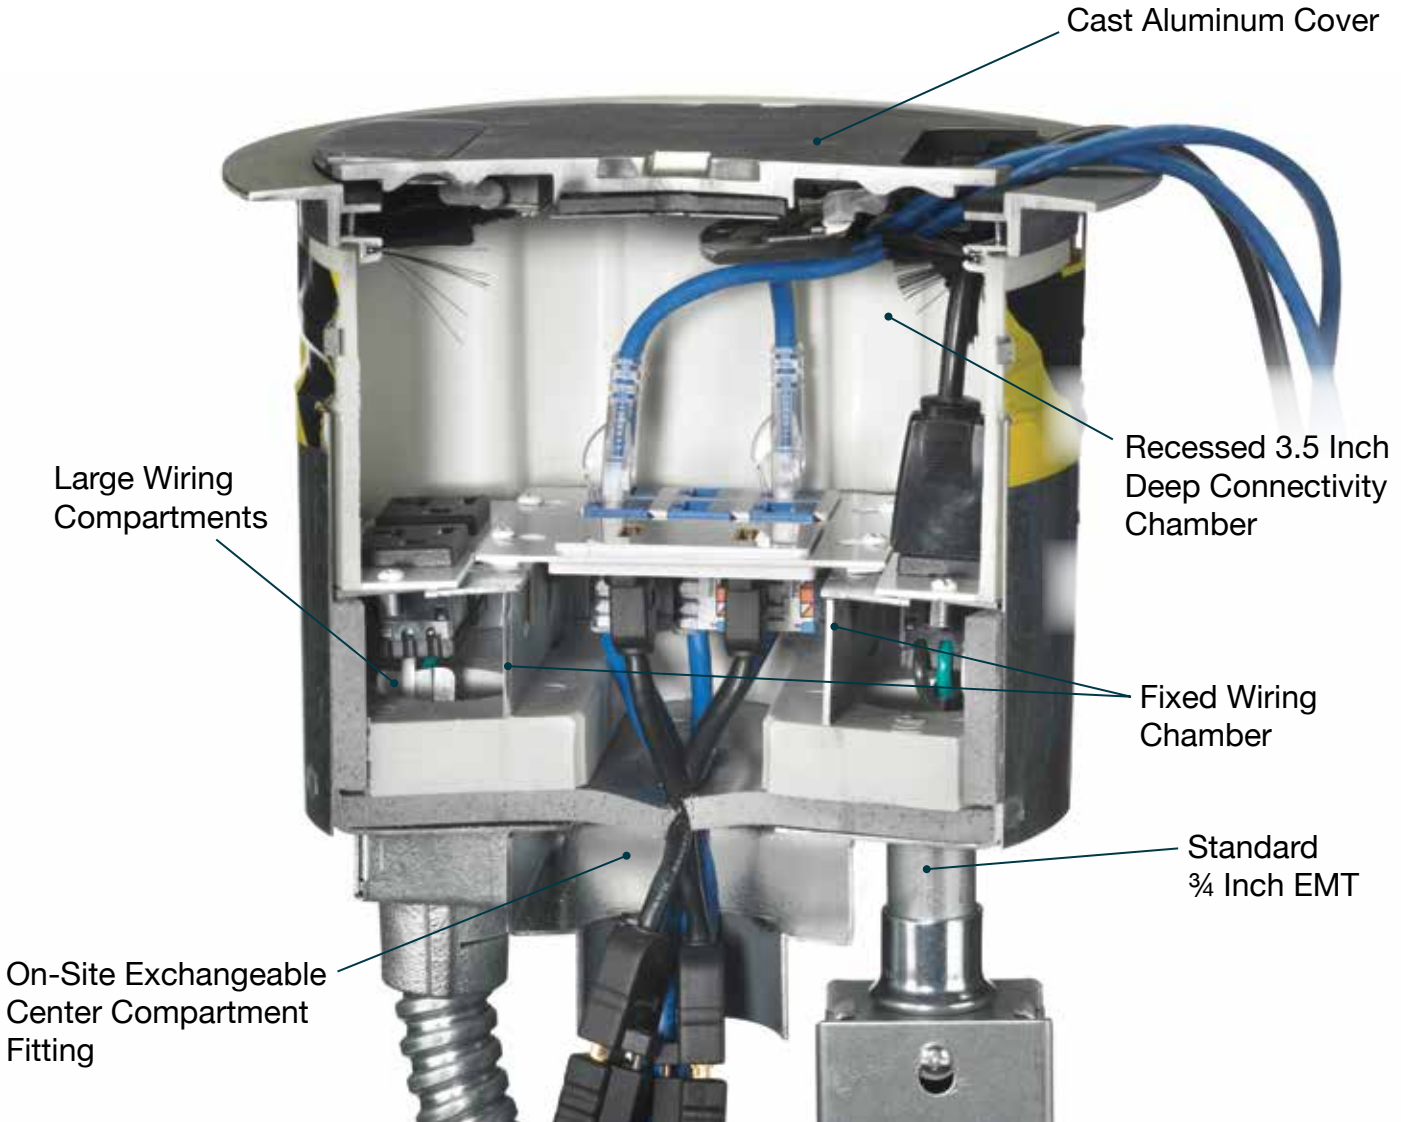

Ordering Information



8 Inch Fire-Rated Poke-Through

| Description | Catalog Number |
|--|----------------------|
| 8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC1 with (1) 1 inch EMT and (1) 1 1/2 inch EMT. | S1R8PTFIT1 |
| 8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC2 with (2) 1 inch EMT. | S1R8PTFIT2 |
| 8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC3 with (1) 2 inch EMT. | S1R8PTFIT3 |
| 8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC1 with (2) 1 inch EMT and (1) 1 1/2 inch EMT. No Junction box or flexible metal conduit. | S1R8PTFIT1CHI |
| 8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC2 with (2) 1 inch EMT. No Junction box or flexible metal conduit. | S1R8PTFIT2CHI |
| 8 Inch Fire-Rated Poke-Through includes: (1) 3/4 inch power EMT plus (1) S1R8JNC3 with (1) 2 inch EMT. No Junction box or flexible metal conduit. | S1R8PTFIT3CHI |











8 Inch Sub-Plates

Center Plate Configurations






- Allows for 3 duplexes or up to 18 data/AV jacks. Other combinations possible
- Accepts third party AV devices (i.e. FSR®, Crestron®, Extron®)
- Standard NEMA spacing between devices



Center Sub-Plates - Single Gang

| Description | Catalog Number | Description | Catalog Number |
|-------------------------------------|---|---------------------------------------|---|
| Blank cover plate |  | (2) Extron® MAAP openings |  |
| | S1R8CSPB | | S1R8CSPC |
| (1) 1 unit Hubbell iSTATION opening |  | (1) 1.5 unit Hubbell iSTATION opening |  |
| | S1R8CSPD | | S1R8CSPE |
| (1) 1.60" Twist-Lock® opening |  | (1) duplex opening |  |
| | S1R8CSPG | | S1R8CSPI |
| (1) 1.40" Twist-Lock® opening |  | (1) Style Line® Decorator opening |  |
| | S1R8CSPJ | | S1R8CSPK |

Center Sub-Plates - Two and Three Gang

| | | | |
|--|---|--|---|
| Two-gang; (4) Extron® AAP openings |  | Two gang; 3 unit Hubbell iSTATION opening |  |
| | S1R8CSPA | | S1R8CSPL |
| Two gang; (2) Style Line® Decorator openings |  | Device depth extension collar (for use with 3rd party device up to 2.5" depth) |  |
| | S1R8CSPM | | S1R8CSPEXT |
| Three gang; blank cover plate |  | | |
| | S1R8CSPN | | |

Note: Rectangle sub-plates are for center compartment, crescent sub-plates are for outer compartments and are not inter-changeable.







Extron® is a registered trademark of Extron Electronics.
 Crestron® is a registered trademark of Crestron Electronics, Inc.
 FSR® is a registered trademark of FSR Inc.

Outer Plate Configurations

- Available in pre-wired duplexes or openings to accommodate third party AV Devices
- Multiple duplexes can be wired in the supplied junction box or independently



Outer Sub-Plates

| Description | Catalog Number | Description | Catalog Number |
|--------------------------------------|--|---|--|
| Blank cover plate |  | Single Extron® MAAP opening |  |
| | S1R8PSPU | | S1R8PSPV |
| Pull through with 1" bushing opening |  | Single Extron® MAAP opening |  |
| | S1R8PSPW | | S1R8PSPX |
| (1) 1 unit Hubbell iSTATION opening |  | Dual 20A pre-wired power cubes; One circuit |  |
| | S1R8PSPY | | S1R8PSPZ |

Recessed 8 Inch Cover

Single Piece 8 Inch FRPT Cover Assembly unit includes solid cast aluminum construction, carpet gasket and mounting hardware



| Finish | Catalog Number |
|----------------------|-------------------|
| Brushed Aluminum | S1R8CVRALU |
| Black Powder Coat | S1R8CVRBLK |
| Brushed Brass Plated | S1R8CVRBRS |
| Bronze Plated Finish | S1R8CVRBRZ |
| Satin Nickel Plated | S1R8CVRNKL |



S1R8PPT



S1FRPTJB



S1R8JNC1



S1R8JNC2



S1R8JNC3

8 Inch Accessories



| Description | Catalog Number |
|--|-------------------|
| Pre-pour tube, includes hardware | S1R8PPT* |
| Abandonment plate, black finish | S1R8ADMTBK |
| Low voltage replacement divider | S1R8DIV |
| Power junction box, 27.0 cubic inches; (1) ¼ inch and (1) 1 inch EMT connector | S1FRPTJB |
| Replacement fitting box (1) 1½ inch & (1) 1 inch EMTs | S1R8JNC1 |
| (2) 1 inch EMTs | S1R8JNC2 |
| (1) 2 inch EMT | S1R8JNC3 |

Note: *Not UL Listed.





Recessed 6 Inch Core Hole, One-Piece Units



One-Piece Pre-Wired 60/40 Split 6 Inch Fire-Rated Poke-Through for Data AV

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (2) Decorator opening sub-plate (S1R6SPW)
- (2) 20A, pre-wired receptacle with 18 inch wire leads (S1R6SPZ)
- (1) 6 inch flange & universal cover assembly (S1R6CVRxx)


Receptacles feature single circuit wiring.

Finish

Brushed Aluminum
Black Powder Coat
Brass Plated
Bronze Plated Finish
Nickel Plated

Catalog Number

S1R6PTWZALU
S1R6PTWZBLK
S1R6PTWZBRS
S1R6PTWZBRZ
S1R6PTWZNKL



One-Piece Pre-Wired 50/50 Split 6 Inch Fire-Rated Poke-Through for Data AV

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (4) 1 Unit Hubbell iSTATION openings (S1R6SPD)
- (1) Decorator opening and (2) keystone openings (S1R6SPE)
- (4) 20A pre-wired receptacles (S1R6SPH)
- (1) 6 inch flange & universal cover assembly (S1R6CVRxx)

Opening architecture Keystone openings accept Hubbell modular jacks and many others.


Receptacles feature single or two circuit wiring and isolated ground capability.

Finish

Brushed Aluminum
Black Powder Coat
Brass Plated
Bronze Plated Finish
Nickel Plated

Catalog Number

S1R6PTDEHALU
S1R6PTDEHBLK
S1R6PTDEHBRS
S1R6PTDEHBRZ
S1R6PTDEHNKL



One-Piece Pre-Wired 50/50 Split 6 Inch Fire-Rated Poke-Through for Third Party Devices

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (3) Extron® AAP openings (S1R6SPA)
- (5) Extron® MAPP openings (S1R6SPC)
- (1) Decorator opening and (2) Hubbell keystone openings (S1R6SPE)
- (4) 20A pre-wired receptacles (S1R6SPH)
- (1) 6 inch flange & universal cover assembly (S1R6CVRxx)

Opening architecture Keystone openings accept Hubbell modular jacks and many others.


Receptacles feature single or two circuit wiring and isolated ground capability.

Finish

Brushed Aluminum
Black Powder Coat
Brass Plated
Bronze Plated Finish
Nickel Plated

Catalog Number

S1R6PTACEHALU
S1R6PTACEHBLK
S1R6PTACEHBRS
S1R6PTACEHBRZ
S1R6PTACEGNKL



One-Piece 6 Inch Fire-Rated Poke-Through with Finished Cover

Assembled unit includes:


- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (1) 6 inch flange & universal cover assembly (S1R6CVRxx)

Finish

Brushed Aluminum
Black Powder Coat
Brass Plated
Bronze Plated Finish
Nickel Plated

Catalog Number

S1R6PTALU
S1R6PTBLK
S1R6PTBRS
S1R6PTBRZ
S1R6PTNKL



One-Piece 6 Inch Fire-Rated Poke-Through for Furniture Feed Applications

Assembled unit includes:

- (1) Hubbell SystemOne 6 inch floor fitting (S1R6PTFIT)
- (1) 6 inch furniture feed flange & cover assembly (S1R6FFCVRxx)
- (1) 2 inch conduit fitting (S1RFFFIT2)
- (1) ¼ inch conduit fitting (S1RFFFIT075)

Finish

Brushed Aluminum
Black Powder Coat
Brass Plated
Bronze Plated Finish
Nickel Plated

Catalog Number

S1R6PTFFALU
S1R6PTFFBLK
S1R6PTFFBRS
S1R6PTFFBRZ
S1R6PTFFNKL



Note: xx indicates finish options.

Extron® is a registered trademark of Extron Electronics.

Recessed 8 Inch Core Hole, One-Piece Units




One-Piece Pre-Wired 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (**S1R8PTFIT1**)
 - (4) 20A, prewired receptacles, 18 inch wire lead, two pieces (**S1R8PSPZ**)
 - (1) Fitting connection box with 1 inch & 1½ inch EMT stubs (**S1R8JNC1**)
 - (1) 8 inch flange & universal cover assembly (**S1R8CVRxx**)
- Receptacles feature single circuit wiring

Finish
 Brushed Aluminum
 Black Powder Coat
 Brass Plated
 Bronze Plated Finish
 Nickel Plated

Catalog Number
S1R8PTZZ1ALU
S1R8PTZZ1BLK
S1R8PTZZ1BRS
S1R8PTZZ1BRZ
S1R8PTZZ1NKL



One-Piece 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (**S1R8PTFIT1**)
- (1) Fitting connection box with 1 inch & 1½ inch EMT stubs (**S1R8JNC1**)
- (1) 8 inch flange & universal cover assembly (**S1R8CVRxx**)

Finish
 Brushed Aluminum
 Black Powder Coat
 Brass Plated
 Bronze Plated Finish
 Nickel Plated

Catalog Number
S1R8PT1ALU
S1R8PT1BLK
S1R8PT1BRS
S1R8PT1BRZ
S1R8PT1NKL




One-Piece Pre-Wired 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (**S1R8PTFIT2**)
 - (4) 20A, pre-wired receptacles, 18 inch wire lead, two pieces (**S1R8PSPZ**)
 - (1) Fitting connection box with (2) 1 inch EMT stubs (**S1R8JNC2**)
 - (1) 8 inch flange & universal cover assembly (**S1R8CVRxx**)
- Receptacles feature single circuit wiring

Finish
 Brushed Aluminum
 Black Powder Coat
 Brass Plated
 Bronze Plated Finish
 Nickel Plated

Catalog Number
S1R8PTZZ2ALU
S1R8PTZZ2BLK
S1R8PTZZ2BRS
S1R8PTZZ2BRZ
S1R8PTZZ2NKL




One-Piece 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (**S1R8PTFIT2**)
- (1) Fitting connection box with (2) 1 inch EMT stubs (**S1R8JNC2**)
- (1) 8 inch flange & universal cover assembly (**S1R8CVRxx**)

Finish
 Brushed Aluminum
 Black Powder Coat
 Brass Plated
 Bronze Plated Finish
 Nickel Plated

Catalog Number
S1R8PT2ALU
S1R8PT2BLK
S1R8PT2BRS
S1R8PT2BRZ
S1R8PT2NKL




One-Piece Pre-Wired 8 Inch Fire-Rated Poke-Through for Data AV

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (**S1R8PTFIT3**)
 - (4) 20A, prewired receptacles, 18 inch wire lead, two pieces (**S1R8PSPZ**)
 - (1) Fitting connection box with one 2 inch EMT stubs (**S1R8JNC3**)
 - (1) 8 inch flange & universal cover assembly (**S1R8CVRxx**)
- Receptacles feature single circuit wiring

Finish
 Brushed Aluminum
 Black Powder Coat
 Brass Plated
 Bronze Plated Finish
 Nickel Plated

Catalog Number
S1R8PTZZ3ALU
S1R8PTZZ3BLK
S1R8PTZZ3BRS
S1R8PTZZ3BRZ
S1R8PTZZ3NKL




One-Piece 8 Inch Fire-Rated Poke-Through

Assembled unit includes:

- (1) Hubbell SystemOne 8 inch floor fitting (**S1R8PTFIT3**)
- (1) Fitting connection box with (1) 2 inch EMT stubs (**S1R8JNC3**)
- (1) 8 inch flange & universal cover assembly (**S1R8CVRxx**)

Finish
 Brushed Aluminum
 Black Powder Coat
 Brass Plated
 Bronze Plated Finish
 Nickel Plated

Catalog Number
S1R8PT3ALU
S1R8PT3BLK
S1R8PT3BRS
S1R8PT3BRZ
S1R8PT3NKL



Note: xx indicates finish options.





HUBBELL SystemOne Recessed 6 and 8 Inch Fire-Rated Poke-Throughs

Hubbell Installation Efficiency Product Solutions



Pre-Wired Raceway

Available in aluminum, steel and non-metallic versions, Hubbell's pre-wired raceway systems will keep your projects on schedule, reduce on-site labor and waste. Our local sales team is available to support your efforts.



Pre-Fab Solutions

Pre-fab solutions can reduce projects by as much as 30% while reducing on-site waste. The Rough in Ready Pre-Fab solution offered by Hubbell provides a variety of options from innovative bracket to cable-ready assemblies.



Modular Wiring

Hubbell CONNEXION Zone Distribution System is a factory assembled modular plug-n-play system that delivers power and data to the workstation in raised floor installations.



Wire Basket Tray System

Hubbell, a recognized leader in power, data, audio video delivery systems, has expanded its offering to include an innovative, flexible and field-configurable Wire Basket Tray System. Hubbell Wire Basket expands the vast array of Floor Boxes, Fire-Rated Poke-Throughs, Surface Raceway Systems, and Ladder Rack Systems.



Literature Support

Hubbell offers an extensive literature library for product support. Downloadable PDFs are available online at www.hubbell-wiring.com under the Media tab.

HUBBELL[®]
Wiring Systems

www.hubbell-wiring.com
www.hubbell-premise.com



Hubbell Wiring Device-Kellems
Hubbell Incorporated (Delaware)
40 Waterview Drive, Shelton, CT 06484
Phone (800) 288-6000 • FAX (800) 255-1031

Hubbell Premise Wiring
Hubbell Incorporated (Delaware)
23 Clara Drive, Suite 103, Mystic, CT 06355
Phone (800) 626-0005 • FAX (860) 535-8328