

## Ground Fault Products

# Commercial Standard Hospital Grade GFCI Receptacles

# HUBBELL



### Features

- Green power indicator and red trip indicator
- Patented AUTOGUARD® self test technology
- Triple wipe construction
- Alarm version provides audible notification of a trip condition

### Ordering Information

| Description  | Catalog Number | UPC          | Color     |
|--|----------------|--------------|-----------|
| 15A, 125V, Style Line®, hospital grade, AUTOGUARD® self test GFCI receptacle, alarm, flush | GFRST83WB      | 783585534152 | GFRST83WB |

### Listings

UL Listed - Canadian and U.S.  
Meets ADA Standards  
Meets all NEC® requirements  
CSA Certified  
NEMA® WD-6 Compliant

### Specifications


|                 |                   |
|-----------------|-------------------|
| Face            | Nylon             |
| Base            | Nylon             |
| Power Contacts  | Brass             |
| Ground Contacts | Brass             |
| Mounting Strap  | Brass             |
| Mounting Screws | Zinc plated steel |

### Performance

| Electrical                    |  |
|-------------------------------|--|
| Amperage                      | 15A/20A, 20A Feed Thru                                   |
| Current Interrupting          | Certified for current interrupting at full rated current |
| Dielectric Voltage            | Withstands 1,500V minimum                                |
| Frequency                     | 60 Hz  |
| Maximum Interrupting Capacity | 10,000A  |
| Trip Level                    | 4 to 6 mA  |
| Trip Time                     | .025 second nominal                                      |
| Voltage                       | 120V AC +10% - 15% (102V to 132V)                        |

| Mechanical              |  |
|-------------------------|--|
| Product Identification  | Ratings are a permanent part of the device             |
| Terminal Accommodation  | #14-#10 AWG copper stranded or solid conductor only    |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |

| Environmental         |                                 |
|-----------------------|---------------------------------|
| Flammability          | UL 94V-2                        |
| Operating Temperature | -35°C to 66°C or -30°F to 150°F |

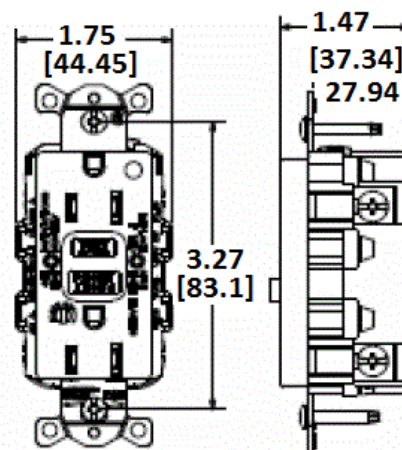

### Accessories

Wallplates for duplex openings

### Online Resources

[eCatalog](#)

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

