

Expandable!



AccessTrak expanded by length.



AccessTrak expanded by width.

The AccessTrak® ramping system is a modular cable protection product that enables users to be ADAAG (American Disabilities Act Accessibility Guidelines) compliant and limits the exposure of cables and hoses to people and light vehicles passing over those cables and hoses. AccessTrak is an expandable five channel system that will protect cable and hose diameters up to 1.31 inches (33.0mm). For applications requiring more than five channels, AccessTrak can be expanded by width. In addition, AccessTrak is expandable by length to protect cables and hoses of any length. The AccessTrak ramping system provides a safe, flexible means of protecting cables and hoses in areas requiring ADA compliance.



- Meets ADA AG (American Disabilities Act Accessibility Guidelines).
- Symbol of accessibility on the product.
- Patented keyway locking system provides tamper resistance.
- Kit form allows for simplified ordering and shipment.
- Polyurethane construction is nonconductive and suitable for indoor or outdoor use.

Accessible... Safe... Hubbell.




Wiring Device-Kellems
www.hubbell-wiring.com


Description	Catalog Numbers	Length in. (mm)	Height in. (mm)	Width in. (mm)	Weight lbs. (kg)	Channel Width in. (mm)	Channel Height in. (mm)
5 Channel AccessTrak kit*, blue and gray.	HBLAT5KITA	41.06" (1043.0)	4.00" (102.0)	42.90" (1090.0)	59.85 lbs. (27.15 kg)	1.34" (34.0)	1.31" (33.0)
5 Channel AccessTrak trough, blue and gray.	HBLAT5A	36.00" (914.0)	1.94" (49.0)	13.34" (339.0)	17.26 lbs. (7.83 kg)	1.34" (34.0)	1.31" (33.0)
AccessTrak trough end rails (set), gray.	HBLAT5ERA	2.50" (63.0)	4.00" (102.0)	13.28" (337.0)	5.21 lbs. (2.36 kg)		
AccessTrak ramps (set), blue.	HBLAT5RAMPA	36.00" (914.0)	1.94" (49.0)	14.50" (368.0)	24.78 lbs. (11.24 kg)		
AccessTrak ramp end rails (set), gray.	HBLAT5RAMPERA	2.50" (63.5)	4.00" (102.0)	14.75" (375.0)	6.30 lbs. (2.86 kg)		

*Consists of (1) HBLAT5A; (1 set) HBLAT5ERA; (1 set) HBLAT5RAMPA; (2 sets) HBLAT5RAMPERA.

Assembled Kit Accessibility label, blue symbol, white background

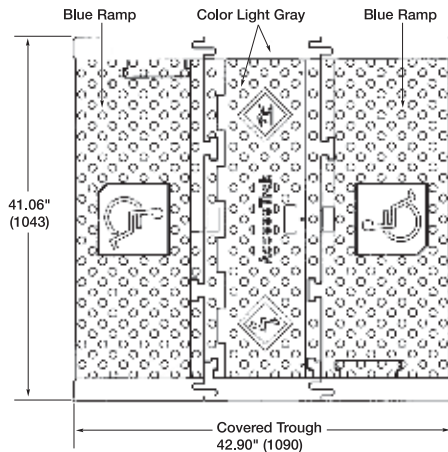


Trough

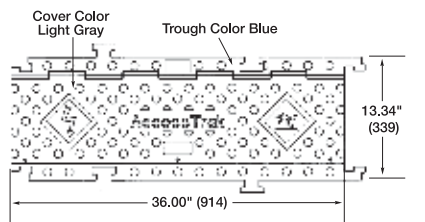


Trough (side view)




Ramp (top view)

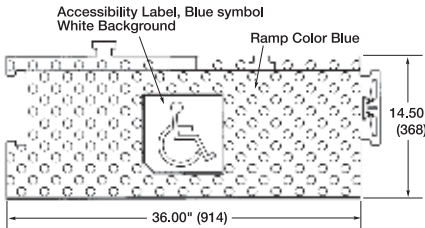


Trough End Rails (side view)




Ramp End Rails (top view)



Ramp End Rails (side view)



Ramp (side view)



Specifications


Material	Polyurethane.
Operating Temperature	-40°F to +120°F (-40°C to +49°C).
Hinge Material	Reinforced fiberglass.
Safety Symbols	Per ANSI Z535.3-1991.
ADA Symbols	Per ADAAG "Symbols of Accessibility".

Load Capacity

Test Fixture Footprint in. (mm)	Measured Load lbs. (N) +/- 20%
7" x 7" (178 x 178)	70°F (21°C) 120°F (49°C)
	10,000 (44,480) 8,000 (35,584)

Other Cable Protection Products

TrukTrak®
TredTrak®



TredTrak "X" & "Y" Fittings

